

# **LUX 1800**

## **KEY STRENGHTS**



**CONSTRUCTION QUALITY** 



**EFFICIENCY** 



**ADAPTABILITY** 



**SAFETY** 

## MAIN FEATURES

#### Technical Features

foin D


Truck	Handled by the customer
Hauling Winch	
Cable diameter (mm)	12
Cable lenght (m)	2500
Cable speed (m/s)	Up to 10
Tensile force (kN)	Up to 49
Rotation (°)	60
Control System	Radio Control
Auxiliary Winch	
Cable lenght (m)	3000
Cable speed (m/s)	Up to 5
Tensile force (kN)	Up to 14,7
Rotation (°)	90
Argano tensionamento	
Cable diameter (mm)	12
Cable lenght (m)	300
Tensile force (kN)	Up to 24,5
Argano fune portante	
Cable diameter (mm)	24
Cable lenght (m)	1800
Tensile force (kN)	Up to 19,6
Rotation (°)	90

### **Areas of application**



**FORESTRY** 



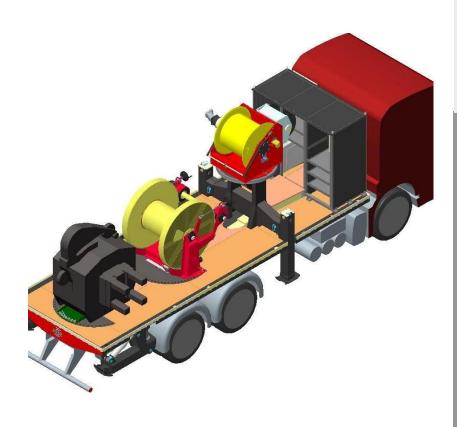

## **LUX 1800**

## **KEY STRENGHTS**



**CONSTRUCTION QUALITY** 



**EFFICIENCY** 



**ADAPTABILITY** 



**SAFETY** 

### **AUTOMATION**

The winch with automatic winding reduces the need for an operator

### **FLEXIBILITY**

The winch rotates 60° per side and 90° in both directions, ensuring flexibility.

### SPEED AND TOWING CAPACITY

The hauling rope offers a speed of 10 m/s and a towing force of 5000 kg

### CONTROL

The remote control adjusts the speed, automatic operation, and displays the carriage position



Transport by Rope - design, production, sale and rental of

Seik Srl Via Dolomiti 46 I - 39040 Trodena (BZ) Tel. +39 0471 887 087 E-Mail: info@seik.it

